

**CUSTOM CEDAR****RESIDENTIAL SECTIONAL GARAGE DOOR**

Ashton Custom Solid Raised Cedar Sectional Door

**DESCRIPTION**

Ashton Custom Cedar Sectional Garage Doors are the ultimate in timber garage doors. They are available in a number of styles from the Solid Raised Cedar to a Mock Cedar Louvre profile.

Ashton Custom Cedar Sectional Garage Doors are hand-crafted from machined cedar to produce doors of distinction.

These doors may be solid cedar or cedar attached to a welded steel frame depending on the style. All hardware is either bolted or screwed to the panels using quality fasteners. Rigid reinforcing struts are used in varying quantities, depending on the size of the door.

A sectional garage door is produced by hinging a number of rigid panels together. These panels move vertically in the opening, then horizontally along the ceiling guided by tracks and counterbalanced with springs.

Ashton Garage Doors recommends that all sectional doors be installed with a proven reliable automatic garage door opener. See your local authorised reseller.

**SIZE RANGE**

Ashton Custom Solid Raised Cedar sectional doors are available in sizes from 1940mm to 2700mm in height and from 2400mm to 6000mm in width.

Ashton Custom Mock Cedar Louvre sectional doors are available in sizes from 1940mm to 2800mm in height and from 2400mm to 6000mm in width.

The number of panels required is dependant on the height of the door. The design of the door can also have some impact.

Additional sizes may be available on request.

**FEATURES**

- ✓ “Tongue & Groove” panel profile.
- ✓ Custom sizes – doors are made to order.
- ✓ For the ultimate look and performance, panel construction is varied to suit each individual style of door.
- ✓ Where used, solid cedar panels have excellent insulation qualities.
- ✓ Where required, a welded 25x25mm galvanised box-section frame is used for the utmost strength.
- ✓ Western Red Cedar timber provides natural variations in colour and grain for a truly unique door.
- ✓ Western Red Cedar timber is the perfect choice for coastal environments creating a door panel that will never corrode.
- ✓ Heavy duty galvanised hinges.
- ✓ Wheels have ball-bearings for smoother, more durable operation.
- ✓ Springs designed to comply with requirements of Aust./NZ Standard i.e. 20,000 cycles.
- ✓ Reinforcing for wide doors.
- ✓ Bottom weather-seal helps prevent leaves and dirt from entering the garage even on slightly uneven floors.
- ✓ All Ashton Architectural Garage Doors are hand-made to exacting standards to ensure each door is of premium quality.

**COLOURS/FINISHES**

Ashton Custom Cedar sectional doors are supplied in their natural state. No sealer or primer is applied to the doors unless requested.

Given that timber is a natural product, variations in colour and grain on a door can be expected.

It is common practice to, where possible, place darker pieces of timber in positions where they will have the greatest exposure to UV rays. This ensures they will fade quickly to create a more even coloured door overall.



# CUSTOM CEDAR

## RESIDENTIAL SECTIONAL GARAGE DOOR

### OPTIONS

The Solid Raised Cedar profile is a majestic door that will enhance any home. The raised infill panels can vary in width to obtain the exact look required.

The Mock Cedar Louvre profile is an intricate eye-catching design. The use of horizontal and/or vertical battens can further enhance the appeal of this door creating an impressive focal point for the home.




Ashton Custom Mock Cedar Louvre Sectional Door

The intended finish of the door can have an influence on the construction method used. Always specify whether the door will have a paint or stain finish,

As with all garage doors, the finished weight must be taken into consideration when designing a door. For this reason it is not always feasible to use certain products or materials in the construction of an Ashton Architectural Garage Door.

### INSTALLATION REQUIREMENTS

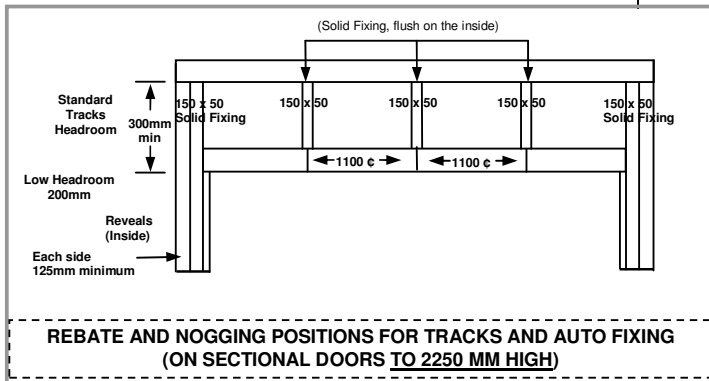

Note: the above specifications can be critical to the proper operation and installation of the door and opener. If unsure, please contact the manufacturer.

### CARE & MAINTENANCE

An Ashton timber garage door should be cared for like any wooden outdoor furniture. If you do nothing, it will weather and turn grey, ultimately deteriorating and cracking. Ashton timber doors must be stained or painted immediately after installation, if not before. Thereafter, regular upkeep such as re-staining should be performed as per the timber finish manufacturer's recommendations. This will result in your Ashton timber door retaining its striking appearance for many years to come.

As the garage door is the largest moving object in a home, Ashton Garage Doors recommends a yearly service by a trained professional. This will ensure that the door and opener will continue to operate with the correct spring tension and safety settings. All moving parts should be checked for excessive wear and tear, and well lubricated with a silicon-based product. All screws/bolts should be regularly checked for tightness.

A monthly test of the garage door opener's safety settings should be carried out in accordance with the opener's owner's manual recommendations.

#### Notes / Information

- Ashton Architectural Garage Doors, in normal residential use are covered by a 1 year warranty for all components and labour conditional on care and servicing as recommended in this specification sheet and by the reseller. Full details of the warranty are available, on request, from your nearest Ashton reseller.
- The company reserves the right to make changes or improvements to the products or accessories without notice and without incurring any obligation to make similar changes or improvements to goods previously ordered.
- Details are correct at date of publication. Specifications subject to change without notice. If a specification is critical to the end use, please contact the manufacturer first.
- Panels may be constructed using a welded steel frame or be of a solid cedar nature depending on style of door required. If this specification is critical to the end use, please contact the manufacturer first.

