

**TG&V CEDAR****RESIDENTIAL SECTIONAL GARAGE DOOR**

Ashton Horizontal HP83 Sectional Door

DESCRIPTION

The Ashton TG&V (Tongue & Groove) Cedar door is a timber sectional overhead garage door with timber boards across each panel.

The Ashton TG&V Cedar Door features boards joined in a 'V' groove fashion either horizontally or vertically. The timber is the highest quality Western Red Cedar and is attached to a 25x25mm galvanised box section welded steel frame. The width and thickness of board can be varied to suit the particular architecture of a home.

A sectional garage door is produced by hinging a number of rigid panels together. These panels move vertically in the opening, then horizontally along the ceiling guided by tracks and counterbalanced with springs.

Ashton Garage Doors recommends that all sectional doors be installed with a proven reliable automatic garage door opener. See your local authorised reseller.

SIZE RANGE

Ashton TG&V Cedar sectional doors are available in sizes from 1870mm to 2600mm in height and from 2400mm to 6000mm in width.

The number of panels required is dependant on the height of the door and, the width of the boards if used horizontally.

Additional sizes may be available on request.

FEATURES

- ✓ "Overlap" panel profile.
- ✓ Custom sizes – doors are made to order.
- ✓ Various cedar board profiles available to suit any style.
- ✓ Welded 25x25mm galvanised box-section frame for the utmost strength.
- ✓ Western Red Cedar timber provides natural variations in colour and grain for a truly unique door.
- ✓ Western Red Cedar timber is the perfect choice for coastal environments as a door cladding that will never corrode.
- ✓ Heavy duty galvanised hinges.
- ✓ Wheels have ball-bearings for smoother, more durable operation.
- ✓ Springs designed to comply with requirements of Aust./NZ Standard i.e. 20,000 cycles.
- ✓ Reinforcing for wide doors.
- ✓ Bottom weather-seal helps prevent leaves and dirt from entering the garage even on slightly uneven floors.
- ✓ All Ashton Architectural Garage Doors are hand-made to exacting standards to ensure each door is of premium quality.

COLOURS/FINISHES

Ashton TG&V Cedar sectional doors are supplied in their natural state. No sealer or primer is applied to the doors unless requested.

Given that timber is a natural product, variations in colour and grain on a door can be expected.

It is common practice to, where possible, place darker pieces of timber in positions where they will have the greatest exposure to UV rays. This ensures they will fade quickly to create a more even coloured door overall.



TG&V CEDAR

RESIDENTIAL SECTIONAL GARAGE DOOR

OPTIONS

Western Red Cedar is the preferred timber for Ashton timber garage doors due to its stable, lightweight nature. Several standard profiles are listed below.

HP88 – ex 100x12mm – Dressed Both Sides

HP83 – ex 100x25mm – Dressed Both Sides

HP84 – ex 180x25mm – Dressed Both Sides

Numerous other profiles are available on request such as rusticated weatherboard and shiplap styles. It is also possible to obtain a 'band-sawn' finish for many of the available profiles.


The cedar boards can be run either horizontally or vertically to suit any architecture. In the case of vertical boards, horizontal cuts will be visible where the panels join.

In the same manner as the Ply & Batten style, Ashton TG&V Cedar doors can have any number of cedar batten profiles and positions overlaid on them to create a truly unique garage door.

The intended finish of the door can have an influence on the construction method used. Always specify whether the door will have a paint or stain finish,

As with all garage doors, the finished weight must be taken into consideration when designing a door. For this reason it is not always feasible to use certain products or materials in the construction of an Ashton Architectural Garage Door.

INSTALLATION REQUIREMENTS

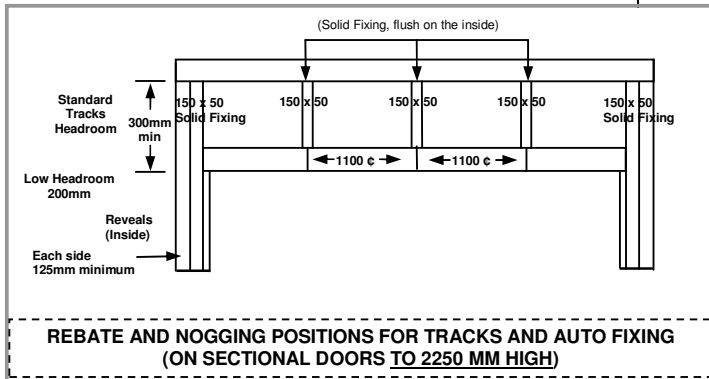

Note: the above specifications can be critical to the proper operation and installation of the door and opener. If unsure, please contact the manufacturer.

CARE & MAINTENANCE

An Ashton timber garage door should be cared for like any wooden outdoor furniture. If you do nothing, it will weather and turn grey, ultimately deteriorating and cracking. Ashton timber doors must be stained or painted immediately after installation, if not before. Thereafter, regular upkeep such as re-staining should be performed as per the timber finish manufacturer's recommendations. This will result in your Ashton timber door retaining its striking appearance for many years to come.

As the garage door is the largest moving object in a home, Ashton Garage Doors recommends a yearly service by a trained professional. This will ensure that the door and opener will continue to operate with the correct spring tension and safety settings. All moving parts should be checked for excessive wear and tear, and well lubricated with a silicon-based product. All screws/bolts should be regularly checked for tightness.

A monthly test of the garage door opener's safety settings should be carried out in accordance with the opener's owner's manual recommendations.

Notes / Information

1. Ashton Architectural Garage Doors, in normal residential use are covered by a 1 year warranty for all components and labour conditional on care and servicing as recommended in this specification sheet and by the reseller. Full details of the warranty are available, on request, from your nearest Ashton reseller.
2. The company reserves the right to make changes or improvements to the products or accessories without notice and without incurring any obligation to make similar changes or improvements to goods previously ordered.
3. Details are correct at date of publication. Specifications subject to change without notice. If a specification is critical to the end use, please contact the manufacturer first.

